

# BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE McKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO, III

OF COUNSEL:  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*

\*ADMITTED TO A BAR OTHER THAN VA

## INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD  
SUITE 500 EAST  
FALLS CHURCH, VA 22042-1210  
USA

(703) 205-8000

FAX. (703) 205-8050  
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com  
web: http://www.bskb.com

CALIFORNIA OFFICE  
650 TOWN CENTER DRIVE, SUITE 1120  
COSTA MESA, CA 92626-7125

GARY D. YACURA  
THOMAS S. AUCHTERLOM  
MICHAEL R. CAMMARATA  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARY ANN CAPRIA  
MARK J. NUELLE, PH.D.  
DARIN E. BARTHOLOMEW  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
W. KARL RENNER  
MARK W. MILSTEAD\*  
JOHN CAMPA\*

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
ANDREW J. TELESZ, JR.  
MARYANNE ARMSTRONG, PH.D.  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. McROBBIE  
GARTH M. DAHLEN, PH.D.  
LAURA C. LUTZ  
ROBERT E. GOOZNER, PH.D.  
HYUNG N. SOHN  
MATTHEW J. LATTIG  
ALAN PEDERSEN-GILES  
JUSTIN D. KARJALA

12/28/99  
PTO  
09/472972  
JCS

12/28/99  
JCS639 U.S. PTO

Date: December 28, 1999  
Docket No.: 0445-0275P

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): KAMEO, Yoji  
KUSAGAWA, Tetsuya; HAMAJIMA, Mitsugu

For: ABSORBENT ARTICLE

Enclosed are:

- ☒ A specification consisting of 17 pages
- ☒ 3 sheet(s) of formal drawings
- ☒ An assignment of the invention
- ☒ Certified copy of Priority Document(s)
- ☒ Executed Declaration ☒ Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☒ Preliminary Amendment
- ☐ Information Disclosure Statement, PTO-1449 and reference(s)

Other \_\_\_\_\_

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$760.00 *****	or	**** **** \$380.00 ****
TOTAL CLAIMS	10 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	2 - 3 =	0	x78 =\$ 0.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 760.00				TOTAL \$ 0.00	

X A check in the amount of \$ 800.00 to cover the filing fee and recording fee (if applicable) is enclosed.

\_\_\_\_\_ Please charge Deposit Account No. 02-2448 in the amount of \$ \_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

\_\_\_\_\_ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 

JOSEPH A. KOLASCH

Reg. No. 22,463

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000  
JAK/kdm

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Yoji KAMEO et al.  
Serial No.: New Application                      Group: Unassigned  
Date Filed: December 28, 1999              Examiner: Unassigned  
Title: ABSORBENT ARTICLE

Preliminary Amendment

Assistant Commissioner for Patents  
Washington, D.C. 20231

December 28, 1999

Dear Sir:

Preliminary to the examination of the above-referenced new U.S. patent application, the following amendments and remarks are respectfully submitted.

IN THE CLAIMS

Please amend claim 9 as follows:

Claim 9, line 1: change "one of claims 6 to 8" to --claim 6--.

REMARKS


The amendment to claim 9 is made in order to place the application in proper U. S. form by correcting improper multiply-dependent claim language. No new matter has been added by this amendment.

Should the Examiner have any questions concerning this application he/she is invited to contact the Applicants' undersigned representative in the Washington, D.C. area at (703) 205-8000.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

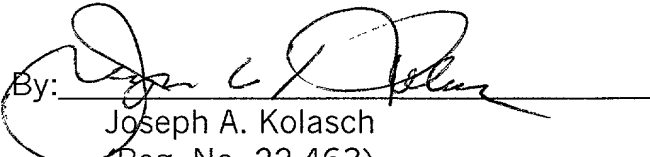By:   
Joseph A. Kolasch  
(Reg. No. 22,463)

P.O. Box 747  
Falls Church, Virginia 22040-0747  
(703) 205-8000

RCS/kdm  
445-275P

## TITLE OF THE INVENTION

## ABSORBENT ARTICLE

## BACKGROUND OF THE INVENTION

## [Field of the Invention]

5           The present invention relates to an absorbent article which is superior in leakage preventing performance from the rear of the article.

          Also, the present invention relates to an absorbent article which is superior in leakage preventing performance and in handling performance.

## [Description of the Related Art]

10           Various types of absorbent articles are proposed each having a pair of left and right wing portions at a front zone or a rear zone thereof, etc. for enhancement of leakage preventing performance.

          A conventional backwardly located wing portions are designed to prevent leakage in such a manner as to intercept body fluids which have overflowed from an absorbent core at a rear zone or which have exuded along a topsheet. However, an absorbent article with such wing portions having functions just mentioned above is not good enough in leakage preventing effect.

20           The conventional absorbent articles with a pair of left and right wing portions are packaged and sold in a condition that the wing portions are folded towards a skin contacting surface side or a skin non-contacting surface side. However, it is not an easy job to fold the wing portions. Moreover, since a folding habit is formed on the wing portions when they are taken out of packages, handling performance is inferior.

## SUMMARY OF THE INVENTION

It is, therefore, a first object of the present invention to provide an absorbent article which is superior in leakage preventing performance, in particular from the rear portion.

It is a second object of the present invention to provide an absorbent article which is superior in leakage preventing performance and which is favorable in handling performance.

5       The present invention (first invention) has achieved the first object by providing an absorbent article comprising an elongate absorbent body and a pair of left and right rear wing portions disposed at longitudinal opposite left and right sides of the absorbent body in a rear zone thereof, wherein each of the rear wing portions includes a liquid-retentive wing portion absorbent core.

10       The present invention (second invention) has achieved the second object by providing an absorbent article comprising an elongate absorbent body and a pair of left and right wing portions disposed at longitudinal opposite left and right sides of the absorbent body, wherein each of the wing portions is formed by laminating at least two sheet materials and the two sheet materials are bonded through an adhesive agent only excluding adhesive agent non-coated areas of a predetermined width formed on the wing portions along opposite side edges  
15       of the absorbent body.

The absorbent article according to the present invention (first invention) is superior in leakage preventing performance, in particular from the rear portion of the article.

20       The absorbent article according to the present invention (second invention) is superior in leakage preventing performance and excellent in handling performance.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view showing one embodiment of an absorbent article according to the present invention (first invention);

Fig. 2 is a sectional view taken on line X-X of Fig. 1;

Fig. 3 is a widthwise sectional view (corresponding to Fig. 2) showing another embodiment of the absorbent article according to the present invention (first invention);

Fig. 4 is a perspective view showing one embodiment of an absorbent article according to the present invention (second invention);

5 Fig. 5 is an enlarged sectional view taken on line X-X of Fig. 4; and

Fig. 6 is a sectional view schematically showing a Y-Y section of Fig. 4.

### DETAILED DESCRIPTION OF THE INVENTION

One preferred embodiment of the present invention (first invention) will now be described.

10 A sanitary napkin 1 as an absorbent article according to this embodiment comprises, as shown in FIGS. 1 and 2, an elongate absorbent body 2 and a pair of left and right rear wing portions 3b disposed at longitudinal opposite left and right sides in a rear zone of the absorbent body 2.

15 In the sanitary napkin 1 according to this embodiment, each of the rear wing portions 3b includes a liquid-retentive wing portion absorbent core 32.

This will be described in more detail. The absorbent body 2 includes a liquid-retentive body absorbent core 21. The body absorbent core 21 and each wing portion absorbent core 32 are isolated from each other through an isolating member 4. That is, the body absorbent core 21 and each wing portion absorbent core 32 are designed such that they are not directly  
20 contacted with each other. By virtue of a provision the isolating member 4 between the body absorbent core 21 and each wing isolating member 4, a large quantity of fluids is prevented from being absorbed by the wing portion absorbent cores at a time and the absorptive force of the wing portion absorbent cores 32 is sustained in a favorable condition during use.

Specifically, the sanitary napkin 1 according to this embodiment comprises, in its

width direction, an elongate upper layer portion 20 comprised of the body absorbent core 21 and a liquid-permeable topsheet 22 disposed in such a manner as to cover its upper and side surfaces; and a lower layer portion 30 comprised of a liquid-impermeable antileakage sheet 31, a liquid-permeable sheet 33 having a generally same configuration as the antileakage sheet 31 and the wing portion absorbent cores 32 interposed between the sheets 31 and 33. A rear zone 30b side and a front zone 30a side of the lower layer portion 30 are enlarged in width dimension. The upper layer portion 20 is fixed onto the liquid-permeable sheet 33 of the lower layer portion 30 through an adhesive agent such that the longitudinal opposite side portions of the lower layer portion 30, which are enlarged in width dimension at the front and rear zones 30a, 30b side, may extend from a longitudinal side edge (side edge 2a of the absorbent body) of the upper layer portion 20. The rear wing portions 3b are formed of the extended lower layer portion 30. That is, in this embodiment, the isolating member 4 is formed by the liquid-permeable sheet 33.

The topsheet 22 covers generally the entire surface of the body absorbent core 21, only excluding a central area of the back surface side. The topsheet 22 is fixed at a widthwise generally central area thereof to the liquid-permeable sheet 33 through an adhesive agent. Opposite left and right side edges of the upper layer portion 20 serve as free edge portions 23 which are not fixed to the lower layer portion 30. At the longitudinal opposite edge portions 1a, 1b of the sanitary napkin 1, neither the upper layer portion 20 nor the lower layer portion 30 is provided with an absorbent core, and the upper layer portion 20 is comprised of only the topsheet 22 while the lower layer portion 30 is comprised of only the antileakage sheet 31 and liquid-impermeable sheet 33, both the upper and lower layer portions 20, 30 being integrally heat sealed.

At a skin contactable portion which is located at the front zone side and which is, when in wear, contacting with the liquid-discharging portion of the wearer, an elastic member is disposed on an edge end portion of each free edge portion 23 (not shown). Instead, a gather is formed thereon. At the skin contactable portion, the body absorbent core 21 is bulky. A groove 5 is formed in the upper layer portion 20 in the same manner as in the common sanitary napkins.



The sanitary napkin 1 according to this embodiment includes a pair of left and right front wing portions 3a which are disposed at the longitudinal opposite left and right sides of the absorbent body 2 on the front zone side. Each of the front wing portions 3a includes a wing portion absorbent core 32. That is, the lower layer portion 30 is provided, on the front zone 30a side which is located on the longitudinal second end portion side, with a portion whose longitudinal side edges extend outwardly. The front wing portions 3a are formed by such extended portions.

The term "front zone" used herein refers to an area or zone of the absorbent article located on the front side of the wearer when in use and more specifically, it refers to an area of the absorbent article located forwardly of the central portion in the longitudinal direction of the absorbent article. Similarly, the term "rear zone" used herein refers to an area or zone of the absorbent article located on the rear side of the wearer when in use and more specifically, it refers to an area of the absorbent article located backwardly of the central portion in the longitudinal direction of the absorbent article.

On the side of back surfaces each of the absorbent body 2, front wing portions 3a and rear wing portions 3b, namely, on an undergarment attachment surface of the antileakage sheet, those surfaces are provided with a body adhesive area 61 for the attachment of an adjacent undergarment, front wing adhesive areas (not shown) and rear wing adhesive areas 62, respectively.

The material for forming the respective component members in the sanitary napkin according to this embodiment will now be described.

As the topsheet 22 and the antileakage sheet 31, a liquid-permeable sheet and a liquid-impermeable sheet commonly used for sanitary napkins can be used without any limitation, in particular.

As the liquid-permeable sheet 33 as the isolating member 4, a nonwoven fabric formed of polyethylene (PE) fiber, polypropylene (PP) fiber, polyethylene-terephthalate (PET) fiber, PE/PET composite fiber or the like. or a sheet material such as polyolefine perforated film, etc.

formed by perforating a sheet of film such a polyethylene or the like is used.

5 The isolating member 4 is preferably formed of material capable of restraining absorption so that body fluids once absorbed by the body absorbent core 21 will not immediately migrate into the wing portion absorbent cores 32. That is, it is preferred that the isolating member 4 is more lowered in capillary penetration pressure than the absorptive material used for the body absorbent core 21, more lowered in hydrophilic property than the body absorbent core 21 and more increased in average pore size than the body absorbent core 21.

10 In the where the isolating member 4 is a liquid-impermeable sheet such as a polyethylene film, only the back surface side of the body absorbent core 21 is used so that the wing portion absorbent core 32 can absorb body fluids.

As the absorbent core 21, one used for sanitary napkins can be used without any limitation in particular.

15 The wing portion absorbent cores 32 are preferably formed of a sheet-like material having reduced liquid dispersibility. Specifically, a dry type pulp sheet obtained by piling up pulp fibers and fixing them with a chemical binder, an embossed absorption paper obtained by embossing a wet type absorption paper, etc. can be listed. Among them, the embossed absorption paper is particularly preferable in view of cost.

20 The wing portion absorbent cores 32 have a somewhat supplementary function in which they absorb body fluids exuded from the body absorbent core 21. With respect to dispersibility at the time of absorption, reduced dispersibility is preferred. Specifically, under the conditions of temperature of 20°C and humidity of 65%, after dropping of 1 g of physiological solution of sodium chloride from about 1 cm above the absorbent core, the absorption area is preferably 80 cm<sup>2</sup> or less after the passage of one minute of time and more  
25 preferably 50 cm<sup>2</sup> or less. By making the absorption area 80 cm<sup>2</sup> or less, dispersion of liquid can be delayed, thus enabling to prevent the body fluids from dispersing within the absorbent core and leaking therefrom.

The embossed absorption paper is enlarged in thickness by subjecting an absorption paper to embossing treatment, so that liquid will not disperse in one direction. The embossing pattern is not limited in particular. However, the absorption paper is preferably embossed in a dotted pattern at density of 1 to 30 dots/cm<sup>2</sup> per 1 cm<sup>2</sup>.

5        With respect to the hardness of the wing portion absorbent core 32, in view of twist prevention and wearing feeling, the wing portion absorbent core 32 is preferably 20 to 500 g in buckling strength and more preferably 50 to 300 g. By making the buckling strength 20 g or more, the wing portions do not get twisted easily and by making the buckling strength 500 g or less, it is prevented that the entire wing portion absorbent core 32 gets overly stiffened.  
10      Owing to this arrangement, the wearer can be free from foreign feel when the absorbent article is in wear.

The buckling strength can be measured in the following manner.

#### <Measuring Method>

15        Measurement of the buckling strength is carried out using an absorbent core, which was left for a day or more in the environment of 20 degrees Centigrade and 65 % of relative humidity (RH), under the same conditions of temperature and humidity.

20        Specifically, an absorbent core is cut out having a length of 150 mm and a width of 30 mm and served as a specimen. Longitudinal ends of this specimen are overlapped into a loop-like configuration such that the width of the overlapped portion is 5 mm. Then, upper and lower areas of 1 cm of the loop-like specimen are fastened at two spots by a stapler with the direction of a length of its needle held in orthogonal to the compressing direction. By doing so, a ring-shaped sample is obtained. The obtained sample is placed on a specimen table of a  
25      Tensilon tester (merchandise name: "RTM-25" manufactured by TOYO BALDWIN Co., Ltd.) with its longitudinal direction serving as a lower surface. After placement, the specimen is compressed in a compression test mode at a measuring speed of 10 mm/min. to obtain a maximum strength when the specimen is buckled. The measuring is carried out in the same manner with respect to five samples separately prepared and an average is obtained so as to be

served as a buckling strength.

In order to obtain a desired stiffness and dispersibility, the thickness of each wing portion absorbent core 32 is preferably 0.2 to 3 mm under a load of 2.5 g/cm<sup>2</sup> and more preferably, 0.3 to 2 mm.

5        As a preferable wing portion absorbent core, a dry type pulp sheet (merchandise name: "JS-50HB" manufactured by HAVIX Co. Ltd., or others) an embossed absorption paper obtained by embossing a wet type absorption paper, and the like can be listed. Among them, the embossed absorption paper is more preferable in view of cost.

10       The sanitary napkin 1 as an absorbent article according to this embodiment can be used in the same manner as the common nighttime sanitary napkins.

15       Since the sanitary napkin 1 according to this embodiment is constructed in the manner as mentioned above, the fluids which have exuded from a rear region of the absorbent body and the fluids which flow without having been absorbed can effectively be absorbed by the rear wing portions 3b. Accordingly, it is superior in leakage preventing performance from the rear region of the napkin 1.

20       Especially, in the case where the wing portion absorbent cores 32 are formed of a sheet-like material having reduced liquid dispersibility, it is seldom that the absorptive capability of the entire surface of each wing portion absorbent core is fully used up because the fluids once absorbed are hardly dispersed. Thus, a state is maintained in which some part of the entire surface has the absorptive capability. Therefore, leakage of fluids caused by not having been absorbed can effectively be prevented.

25       The sanitary napkin according to this embodiment can be obtained as follows. First, the wing portion absorbent cores are placed on the antileakage sheet, then the liquid-permeable sheet is additionally placed thereon in such a manner as to cover the wing portion absorbent cores, and the antileakage sheet and the liquid-permeable sheet are fixedly heat sealed at a peripheral edge portion of each wing portion absorbent core to thereby form the

lower layer portion. Then, the upper layer portion, which has been separately formed by covering the body absorbent core with the topsheet, is affixed onto the lower layer portion through an adhesive agent and the longitudinal opposite end portions are heat sealed, for example.

5 In the above embodiment, a sanitary napkin comprised of the upper layer portion 20 and the lower layer portion 30 has been exemplified. In the alternative, the sanitary napkin may be constructed such that the body absorbent core 21 and the wing portion absorbent cores 32 are arranged in parallel in a width direction of the sanitary napkin as shown in Fig. 3 and a sheet material formed of a hydrophobic nonwoven fabric, a foam or the like is disposed  
10 between the body absorbent core 21 and each wing portion absorbent core 32 as the isolating member 4..

One embodiment of the second invention will now be described. In the following description, different points from the first invention will be described in great detail and description of the same points will be omitted. For those points not described in particular, the  
15 description made with respect to the embodiment of the first invention is applicable, where appropriate.

A sanitary napkin 1, as an absorbent article according to one embodiment of the second invention, has a pair of wing portions 3 each formed of a laminated sheet 3' by laminating at least two sheet materials as shown in FIGS. 4 to 6. The two sheet materials are  
20 bonded through an adhesive agent 34 only excluding linear adhesive agent non-coated areas 35 of a predetermined width formed on the wing portions 3 along opposite side edges 2a of the absorbent body 2.

This will be described in more detail. The two sheet materials are; an antileakage sheet 31 and an absorptive sheet 32 disposed on the antileakage sheet 31. In this embodiment, the  
25 laminated sheet 3' further includes a liquid-permeable sheet 33 disposed in such a manner as to cover an upper surface side of the absorptive sheet 32. According to the arrangement of the liquid-permeable sheet thus disposed, blood which flows to the rear side portion of the napkin can promptly permeates through the liquid-permeable sheet and can be absorbed by the

absorptive sheet, blood is prevented from leaking, and no blood remains in the liquid-permeable sheet, so that excellent dry feeling is exhibited.

5 The wing portions 3 comprise a pair of left and right front wing portions 3a disposed at longitudinal opposite left and right sides of the absorbent body 2 on the side of a front zone thereof and a pair of left and right rear wing portions 3b disposed at longitudinal opposite left and right sides of the absorbent body 2 on the side of a rear zone thereof. This arrangement makes it possible that, in use, the front wing portions is wrapped around the shorts thereby preventing the napkin from twisting and blood from leaking to the shorts, and that the rear wing portions cover the shorts in the wider range thereby preventing blood from leaking to the rear side.

10 The sanitary napkin 1 according to this embodiment comprises, in its width direction, an elongate upper layer portion 20 comprised of a body absorbent core 21 and a liquid-permeable topsheet 22 disposed in such a manner as to cover its upper and side surfaces; and a lower layer portion 30 comprised of a liquid-impermeable antileakage sheet 31, a liquid-permeable sheet 33 having a generally same configuration as the antileakage sheet 31 and the absorptive sheet 32 interposed between the sheets 31 and 33. A rear zone 30b side and a front zone 30a side of the lower layer portion 30 are enlarged in width dimension.

20 The upper layer portion 20 is placed on the liquid-permeable sheet 33 of the lower layer portion 30 such that the longitudinal opposite side portions of the lower layer portion 30, which are enlarged in width dimension may extend from longitudinal side edges of the upper layer portion 20. The front wing portions 3a and the rear wing portions 3b are formed by the extended lower layer portion 30.

25 According to the arrangement of the upper layer portion 20 and the lower layer portion 30 thus structured, the lower layer portion 30 firmly fixes to the shorts and the upper layer portion 20 fits to the body, so that blood is easy to absorb and hard to leak. In addition, even if the lower layer portion twists in consistent with the twist of the shorts, the upper layer portion is free from the twist. Also, even if the upper layer portion twists, the lower layer portion keeps from twisting, thus providing a more hardly-leaking structure.

In this embodiment, an adhesive agent 34 is applied to an entire surface of the absorptive sheet 32 only excluding adhesive agent non-coated areas 35, so that the antileakage sheet 31 and the absorptive sheet 32 are bonded together. The adhesive agent non-coated areas 35 are provided on the absorbent body 2 side in the front wing portions 3a and the rear wing portions 3b. In this way, it is desirable, in view of operability, to provide adhesive agent non-coated areas at locations adjacent to the absorbent body 2. A distance  $t$  from a side edge 2a to the absorbent body 2 is preferably 0 to 40 mm and more preferably 0 to 20 mm. That is, in the case where there are provided an upper layer portion and a lower layer portion as in this embodiment, the side edge 2a of the absorbent body 2 may be located on the adhesive agent non-coated area 35.

A predetermined width  $w$  of the adhesive agent non-coated area 35 is preferably 2 to 20 mm in view of handling performance of the wing portion when attached to the adjacent undergarment.

Also, in view of handling performance of the wing portion, the coating basis weight of the adhesive agent 34 is preferably 3 to 400 g/m<sup>2</sup> and the coating thickness is preferably 3 to 400  $\mu$ m.

The bending stiffness of the adhesive agent coated area is preferably 1.2 times or more and particularly preferably 1.5 times or more of the bending of the adhesive agent non-coated area 35. By making the bending stiffness of the adhesive agent coated area 1.2 times or more of the bending stiffness of the adhesive agent non-coated area 35, a difference of handling performance occurs due to a difference in bending stiffness and the wing portion becomes easy to be bent at the adhesive agent non-coated area with the result that the handling performance is enhanced.

The bending stiffness of the adhesive agent non-coated area 35 is preferably 0.0001 to 0.0015 mN  $\cdot$  m<sup>2</sup>/m.

The stiffness of the adhesive agent coated area is preferably 0.002 to 0.02 mN  $\cdot$  m<sup>2</sup>/m.

Recoverability of the adhesive agent non-coated area 35 is preferably 0.05 to 0.15 mN • m/m.

Recoverability of the adhesive agent coated area is preferably 0.18 to 0.5 mN • m/m.

Bending stiffness and recoverability can be measured in the following manner.

5        The wing portion (which may include the absorbent body where necessary) is cut out having a length of 20 mm and a width of 60 mm, in such a manner as to transverse the adhesive agent non-coated area and served as a sample of the adhesive agent non-coated area. The obtained sample is loaded on a bending stiffness tester (merchandise name: "KES" manufactured by KATO TECH. Co., Ltd.) with its adhesive agent non-coated area located  
10        between chucks, and bending stiffness and recoverability are measured.

The adhesive agent coated area is cut out having a length 20 mm and a width 60 mm, so as not to include the adhesive agent non-coated area and served as a sample. The obtained sample is loaded on a bending stiffness tester (merchandise name: "KES" manufactured by KATO TECH. Co., Ltd.), and bending stiffness and recoverability are measured.

15        The measurement is carried out by bending the entire sample into an arcuate configuration having a constant curvature at a constant velocity and detecting a bending moment resulting therefrom.

The measuring conditions are set such that the deformation speed is 0.5 (cm<sup>-1</sup>)/sec. in a range of the curvature K = -2.5 to +2.5 (cm<sup>-1</sup>).

20        The bending stiffness is obtained by obtaining an inclination between K=0.5 and K=1.5 from the characteristic observed during the increasing process of an absolute value K. The recoverability is an average value of a hysteresis width in a range of K=0.5 to 1.5.

A basic construction of the absorbent body 2 and the material for forming the topsheet 22, body absorbent core 21, antileakage sheet 31 and liquid-permeable sheet 33 are the same  
25        as the embodiment of the first invention.



As the material for forming the absorptive sheet 32, the same material as the material for forming the wing portion absorbent core in the embodiment of the first invention can be used. And the thickness and buckling strength are also preferably the same.

5 The sanitary napkin 1 as an absorbent article according to this embodiment is sold in the state the front wing portions 3a and the rear wing portions 3b are folded towards the skin-contacting surface side or the skin non-contacting surface side of the napkin, respectively, to form a three-fold design and then wrapped up in a package as in the common nighttime sanitary napkins.

10 With respect to the sanitary napkin of this embodiment, since the adhesive agent non-coated area 35 is functioned as a flexible axis, the wing portions can easily be folded when the napkin is wrapped up in a package. Moreover, handling performance is good in use. The wing portions 3 are easy to fold due to the function of the adhesive agent non-coated areas 35 and a folding habit is not easily formed, either. Accordingly, it can attached to the adjacent undergarment in a more stable manner, thus further enhancing slip preventing performance and absorbing performance.

15 In the case where the wing portion uses an absorptive sheet and the absorptive sheet uses an embossed absorption paper, the absorbing performance is more enhanced and the antileakage effect is further enhanced.

20 The sanitary napkin according to this embodiment can be manufactured in the same manner as the embodiment according to the first invention only except that an adhesive agent is applied to the entire surface of the antileakage sheet only excluding the adhesive agent non-coated area and the absorptive sheet is bonded to the antileakage sheet through the adhesive agent.

25 Although a sanitary napkin comprised of an upper layer portion and a lower layer portion is exemplified in this embodiment, the body absorbent core and the wing portion absorbent cores may be arranged in parallel in the width direction of the absorbent article.

Although a wing portion comprised of a front and a rear wing portion is exemplified in this embodiment, the wing portion may be comprised of one of the front and rear wing portions.

5 The configuration of the adhesive agent non-coated area is not limited to the above embodiment. It is also accepted that the adhesive agent non-coated area exhibits a curved configuration, that a plurality of adhesive agent non-coated areas are discontinuously arranged, and that the adhesive agent non-coated areas are arranged in two or more rows in parallel relation.

10 The adhesive agent applied to the entire surface of the wing portion only excluding the adhesive agent non-coated area, may be applied without leaving any non-coated area, or it may be applied in a spiral pattern or in a line-like pattern.

The two sheet materials forming the wing portion are not necessarily be the absorbent sheet. Instead, the topsheet may be directly extended and laminated on the antileakage sheet

15 Although a sanitary napkin is exemplified in the embodiments according to the first and second inventions, the present invention is likewise applicable to an incontinence pad and the like.

## WHAT IS CLAIMED IS:

1. An absorbent article comprising an elongate absorbent body and a pair of left and right rear wing portions disposed at longitudinal opposite left and right sides of said absorbent body in a rear zone thereof, wherein each of said rear wing portions includes a liquid-retentive wing portion absorbent core.
2. An absorbent article according to claim 1, wherein said absorbent body includes a liquid-retentive body absorbent core, and wherein said body absorbent core and said wing portion absorbent core are isolated with each other through an isolating member.
3. An absorbent article according to claim 1, wherein said wing portion absorbent core is 80 cm<sup>2</sup> or less in absorptive area after 1 minute after dropping of 1 g of a physiological solution of sodium chloride.
4. An absorbent article according to claim 1, wherein said wing portion absorbent core is comprised of an embossed absorptive paper.
5. An absorbent article according to claim 1, wherein said wing portion absorbent core is 20 to 500 g in buckling strength.
6. An absorbent article comprising an elongate absorbent body and a pair of left and right wing portions disposed at longitudinal opposite left and right sides of said absorbent body, wherein each of said wing portions is formed by laminating at least two sheet materials and said two sheet materials are bonded through an adhesive agent only excluding adhesive agent non-coated areas of a predetermined width formed on said wing portions along opposite side edges of said absorbent body.
7. An absorbent article according to claim 6, wherein said two sheet materials are an antileakage sheet and an absorptive sheet placed on said antileakage sheet.
8. An absorbent article according to claim 7, wherein said absorptive sheet is provided on

an upper surface side thereof with a liquid-permeable sheet in such a manner as to cover said absorptive sheet.

9. An absorbent article according to ~~one of~~ ~~claims~~ 6 ~~to~~ 8, wherein said wing portion comprises a pair of left and right front wing portions disposed at longitudinal opposite left and right sides of said absorbent body on the side of a front zone thereof and a pair of left and right rear wing portions disposed at longitudinal opposite left and right sides of said absorbent body on the side of a rear zone thereof.

10. An absorbent article according to claim 9, wherein said absorbent article comprises an elongate upper layer portion comprised of a body absorbent core and a liquid-permeable topsheet disposed in such a manner as to cover upper and side surfaces of said body absorbent core; and a lower layer portion comprised of a liquid-impermeable antileakage sheet, a liquid-permeable sheet having a generally same configuration as said antileakage sheet and an absorptive sheet interposed between said liquid-impermeable antileakage sheet and said liquid-permeable sheet, said lower layer portion being enlarged in width dimension on the side of the front zone and the rear zone,

said upper layer portion being placed on said liquid-permeable sheet of said lower layer portion such that the longitudinal opposite side portions of said lower layer portion, which are enlarged in width dimension, may extend from a longitudinal side edge of said upper layer portion, and,

said front and rear wing portions being formed of said extended lower layer portion.

## ABSTRACT OF THE DISCLOSURE

An absorbent article 1 comprising an elongate absorbent body 2 and a pair of left and right rear wing portions disposed at longitudinal opposite left and right sides of the absorbent body 2 in a rear zone thereof, wherein each of the rear wing portions 3b includes a liquid-retentive wing absorbent core 32, and an absorbent article comprising an elongate absorbent body 2 and a pair of left and right wing portions 3 disposed at longitudinal opposite left and right sides of the absorbent body 2, wherein each of the wing portions 3 is comprised of a laminated sheet 3' formed by laminating at least two sheet materials and the two sheet materials are bonded to and along opposite side edges 2a of the absorbent body 2 through an adhesive agent 34 only excluding adhesive agent non-coated linear areas of a predetermined width formed on the wing portions 3.

10






Fig. 2




A cross-sectional view of a multi-layered structure. It features a central core (21) with a stippled pattern, flanked by side layers (22) with a diagonal hatching pattern. The entire assembly is sandwiched between two thin, solid layers (31). The outermost layers (4) are shown on the left and right sides, with a dashed line indicating a transition or boundary. The bottom layer (32) is a thin, solid line.

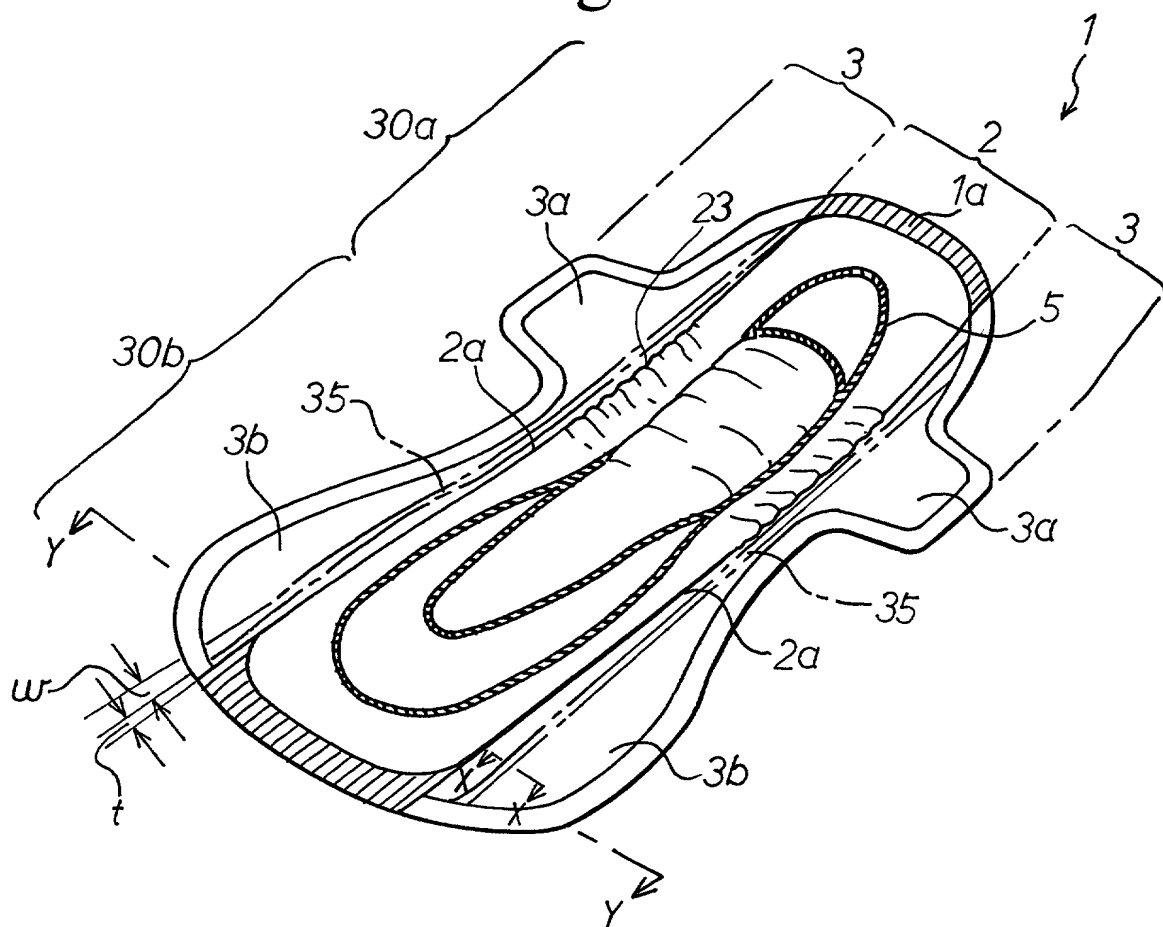

# Fig. 5

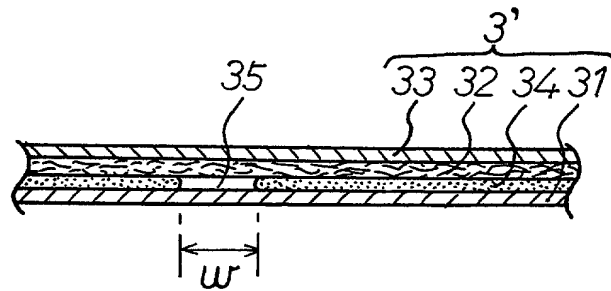

# Fig. 6

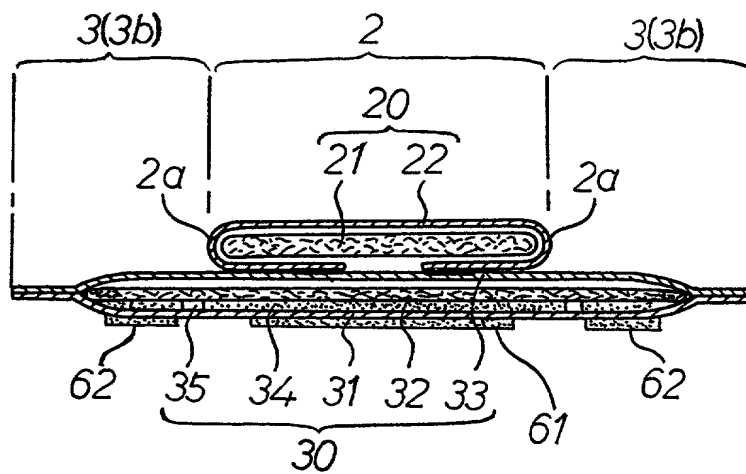



# BIRCH, STEWART, KOLASCH & BIRCH, LLP

## COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

ATTORNEY DOCKET NO.

445-275P

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:



As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:\*

Insert Title

**"ABSORBENT ARTICLE"**

Check Box If  
Appropriate -  
For Use Without  
Specification  
Attached

the specification of which is attached hereto unless the following box is checked:

☐ was filed on \_\_\_\_\_ as United  
States Application Number \_\_\_\_\_ or  
PCT International Application Number \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s)

Insert Priority  
Information  
(if appropriate)

			Priority	Claimed
10-372065	Japan	December / 28 / 1998	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
10-372066	Japan	December / 28 / 1998	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
			<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)

(Filing Date)

(Application Number)

(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Country

Application No.

Date of Filing (Month/Day/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Number)

(Filing Date)

(Status — patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status — patented, pending, abandoned)

\*NOTE: Must be completed.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

RAYMOND C. STEWART (Reg. No. 21,066)  
 JOSEPH A. KOLASCH (Reg. No. 22,463)  
 JAMES M. SLATTERY (Reg. No. 28,380)  
 CHARLES GORENSTEIN (Reg. No. 29,271)  
 LEONARD R. SVENSSON (Reg. No. 30,330)  
 MARC S. WEINER (Reg. No. 32,181)  
 JOE McKINNEY MUNCY (Reg. No. 32,334)  
 C. JOSEPH FARACI (Reg. No. 32,350)

TERRELL C. BIRCH (Reg. No. 19,382)  
 ANTHONY L. BIRCH (Reg. No. 26,122)  
 BERNARD L. SWEENEY (Reg. No. 24,448)  
 MICHAEL K. MUTTER (Reg. No. 29,680)  
 GERALD M. MURPHY, JR. (Reg. No. 28,977)  
 TERRY L. CLARK (Reg. No. 32,644)  
 ANDREW D. MEIKLE (Reg. No. 32,868)  
 ANDREW F. REISH (Reg. No. 33,443)

PLEASE NOTE:  
 YOU MUST  
 COMPLETE THE  
 FOLLOWING:

Send Correspondence to: **BIRCH, STEWART, KOLASCH AND BIRCH, LLP**

P.O. Box 747  
 Falls Church, Virginia 22040-0747  
 Telephone: (703) 205-8000  
 Facsimile: (703) 205-8050

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole  
 Inventor:  
 Insert Name of Inventor  
 Insert Date This  
 Document Is Signed  
 Insert Residence  
 Insert Citizenship

Insert Post Office  
 Address

Full Name of Second  
 Inventor, if any:  
 see above

Full Name of Third  
 Inventor, if any:  
 see above

Full Name of Fourth  
 Inventor, if any:  
 see above

Full Name of Fifth  
 Inventor, if any:  
 see above

\*Note: Must be completed  
 — date this document is  
 signed.

GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Yoji	Kameo	<i>Yoji Kameo</i>	December 3, 1999
Residence (City, State & Country)		CITIZENSHIP	
Haga-gun, Tochigi-ken, Japan		Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi-ken, Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Tetsuya	Kusagawa	<i>Tetsuya Kusagawa</i>	December 3, 1999
Residence (City, State & Country)		CITIZENSHIP	
Haga-gun, Tochigi-ken, Japan		Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi-ken, Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Mitsugu	Hamajima	<i>Mitsugu Hamajima</i>	December 3, 1999
Residence (City, State & Country)		CITIZENSHIP	
Haga-gun, Tochigi-ken, Japan		Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
c/o Kao Corporation, Research Laboratories, 2606, Akabane, Ichikai-machi, Haga-gun, Tochigi-ken, Japan			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME	FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			